

> High Customer Satisfaction
 > Quick Trunaround
 > Cost Effectiveness
 > Quality & Reliablity
 > Customer Relationship





Multi-Biometric Time Attendance & Access Control System

uFace 301



Specification

Storage Capacity

Face Capacity : 3,000 ID Card Capacity : 10,000 Transaction Capacity : 1,00,000 Push Data : Yes Communication : TCP/IP, RS232/485, USB Host Display : 4.3-Inch Touch Screen

Standard Functions

Automatic Status Switch, Self-Service Query, Work Code, SMS, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID Access Control Interfaces for: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm Wiegand : Output

Optional Functions MiFare Card, Wi-Fi, 4G,

2000 mAh Backup Battery

Power & Environment

Power Supply : 12V 3A Operating Temperature : 0 °C ~ 45 °C Operating Humidity : 20% - 80% Dimension (in mm) : 193.6 x 165.2 x 86 Package Weight : 1.6 kg

Features

- Multi-languages
- High verification speed
- Advanced and user-friendly UI
- Chip encryption for firmware protection
- Optional built-in battery backup
- providing approximately 4 hours of continuous operation
- Easy to extend functions and customize client's requirements
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo, enhancing the security level of verification



An Official Channel Partner for eSSL

WhatsApp / Cell Number: 9655509003/4/5

Email Address: smartbiosecuresystems@gmail.com


Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development
www.esslsecurity.com



FIRE ALARM-DESKTOP-LAPTOP-PRINTERS-NETWORKING

Our HAPPY Customers



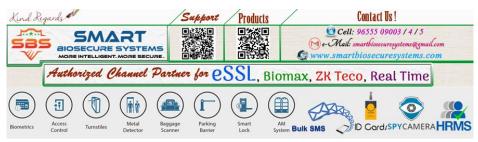

Address: 32, Karnan St, AA-2, Ground Floor, Mogappair West, Chennai - 600037. We do Sale · Support · Service and Repair for all locations in India.